

L-force

Inverter Drives 8400




Precisely tailored to your application



Lenze

This is what we stand for.

You want to implement your machine and plant concepts efficiently and easily or optimise existing concepts to reduce costs? Then, Lenze is the partner you are looking for. For more than 60 years, drive and automation systems have been our core competence.

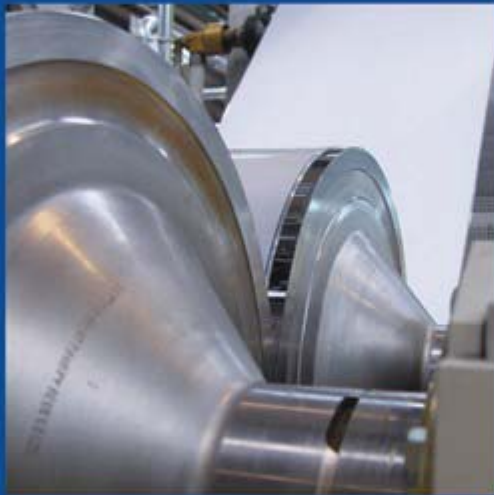

Drive and automation technology set in motion by Lenze – for example in logistics centres, in the textile and printing industry, in the automotive industry or as the driving force behind robots.

Lenze | about us

We can offer you automation solutions including control, visualisation and drive technology from a single source. Our drive systems will improve the performance of your machines. From project planning to commissioning, we have the know-how, whilst our international sales and service network can provide you with expert help and advice at any time.

Cut your process costs and increase your ability to compete. Let us analyse your drive technology tasks and support you with made-to-measure solutions. We can take an integrated approach to projects thanks to the scalability of our products and the scope of the overall portfolio. We can get the best from your machines and systems.



At your side all over the world – with thorough and professional support from our motivated team.

L-force | Your future is our drive

L-force - your future is our drive

L-force is our new product philosophy introduced in response to the need to reduce costs, save time and increase efficiency. This generation of drive and automation technology sets innovation, flexibility, usability and system culture in perfect harmony.

L-force is innovation

In order to offer you more options and (added) value, we are constantly working to improve our solution still further.

L-force means flexibility

Performance, functional range, software, technical services and after-sales service - you get exactly the combination you need.


L-force means usability

Commissioning is made easier thanks to preconfigured solutions and simple, function-based engineering.

L-force means system


With L-force, everything is perfectly matched.

Let us help you shape your future.

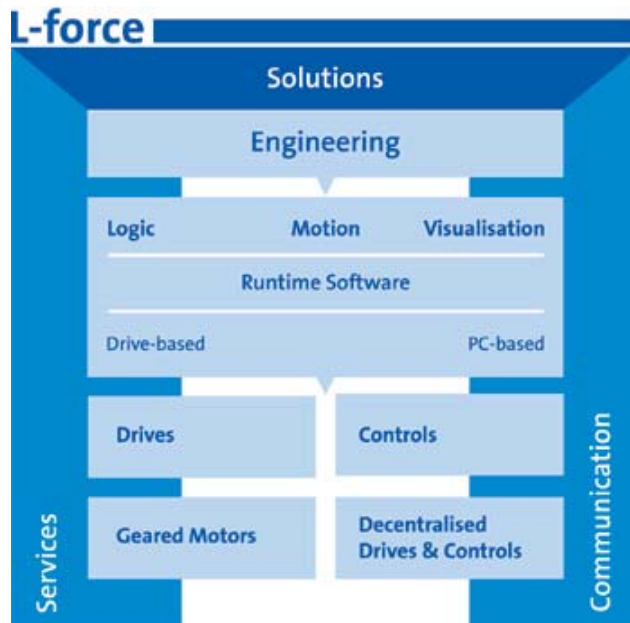

L-force is an integrated range of components, solutions, systems and technical services. The overview shows the overall portfolio along with the individual product/solution segments.

System overview | Inverter Drives 8400

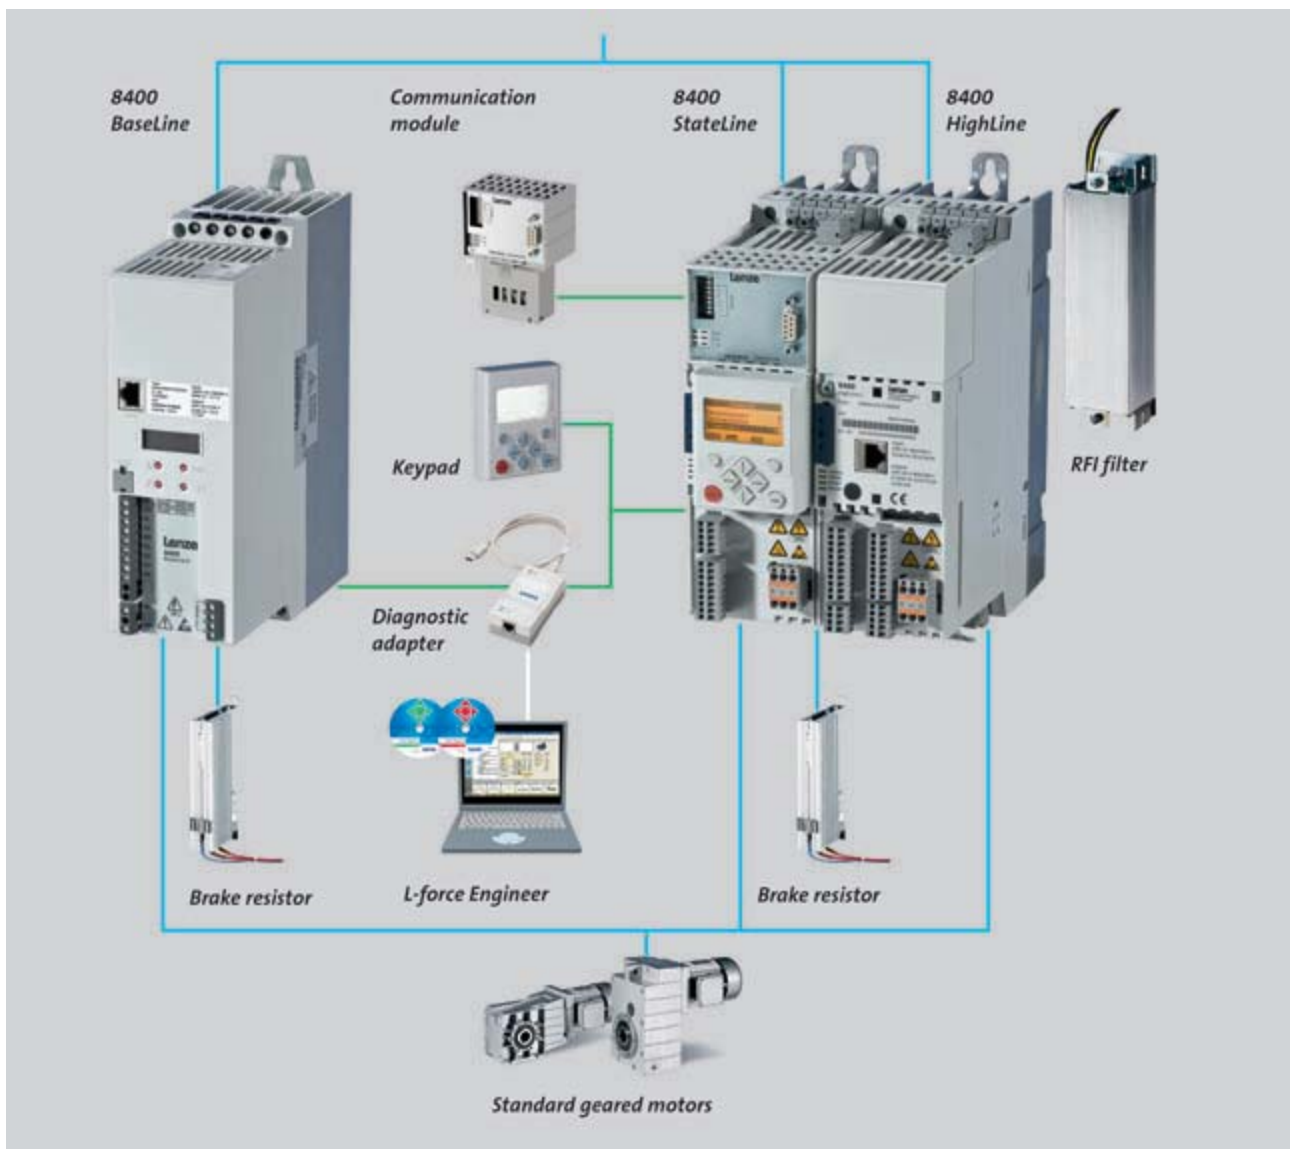

Further catalogues

Frequency inverters and accessories of the L-force Inverter Drives 8400 series in the power range from 0.25 to 15 kW can be found in this catalogue. Additional components and system solutions can be found in the following catalogues:

- ▶ smd, 8200 vector, 8200 motec and 9300 vector frequency inverters up to 90 kW can be found in the frequency inverters catalogue
- ▶ Servo Drives 9400 up to 400 kW can be found in the Servo Drives 9400 catalogue
- ▶ 9300 servo inverters and the ECS servo system up to 75 kW are contained in the Servo inverters catalogue.
- ▶ Human machine interfaces, I/O systems, remote maintenance components and other automation components can be found in the PC-based automation catalogue.
- ▶ You will find standard motors in the Three-phase AC motors catalogue.
- ▶ Standard geared motors appear in the G-motion const catalogue.

Contents | Inverter Drives 8400



Product information

Product key	8
List of abbreviations	10
About this catalogue	11
The rightsizing principle	12
Functions and features	14
Control connections	16
Standards and operating conditions	17



Inverter

Rated data 230 V	18
Rated data 400 V	21



Accessories

Brake resistors	26
Mains chokes	28
RFI filter	29
24 V power supply unit	31
Brake switch	31
USB diagnostic adapter	32
Connecting cables for USB diagnostic adapter	32
X400 keypad	33
X400 diagnosis terminal	33
PC system bus adapter	34
Shield mounting	34
Setpoint potentiometer	35
Further accessories	35

Contents | Inverter Drives 8400



Modules

PROFIBUS communication module	36
EtherCAT communication module	38



L-force Engineer

General information	40
Functions and features	41
Selection and order data	42
Data access/communication	43

Lenze world-wide

Lenze world-wide	46
------------------	----



Inverter Drives 8400

Product information

Product key

E84AV S C E 751 2 S X 0

Design

- BD – Baseline D (0.25 ... 3.0 kW)
- BC – Baseline C (0.25 ... 3.0 kW)¹⁾
- SC – StateLine C (0.25 ... 15.0 kW)¹⁾
- HC – HighLine C (0.25 ... 15.0 kW)¹⁾

Mounting type

- E – Built-in unit
- D – Push-through technique (0.25 ... 15.0 kW)²⁾
- C – Cold plate technology (0.25 ... 15.0 kW)²⁾

Power

- 251 – 0.25 kW
- 371 – 0.37 kW
- 551 – 0.55 kW
- 751 – 0.75 kW
- 112 – 1.1 kW
- 152 – 1.5 kW
- 222 – 2.2 kW
- 302 – 3.0 kW
- 402 – 4.0 kW
- 552 – 5.5 kW
- 752 – 7.5 kW
- 113 – 11.0 kW
- 153 – 15.0 kW

Voltage class

- 2 – 230/240 V, 1/N/PE AC (0.25 ... 2.2 kW)
- 4 – 400/500 V, 3/PE AC (0.37 ... 15.0 kW)

Ambient conditions

- S – Standard
- V – Harsh environment (coated printed circuit boards)²⁾

Safety engineering

- X – Without safety engineering
- B – With safety engineering (STO)²⁾

¹⁾ CANopen on board

²⁾ 8400 StateLine C and 8400 HighLine C





Equipment

Pluggable mains connection*

Pluggable connection DC-bus connection (400 V types)

Pluggable relay connection*

Communication module* optional

Safety engineering (STO)* optional

Memory module

- ▶ pluggable
- ▶ contains all drive data

L-force diagnostics interface for USB adapter with PC connection or keypad

Pluggable control terminals* with spring contacts


CANopen on board

- ▶ DS301-compliant
- ▶ T plug

Integrated shield connection* for the motor cable

Integrated shield connection for control cables

Pluggable motor connection*

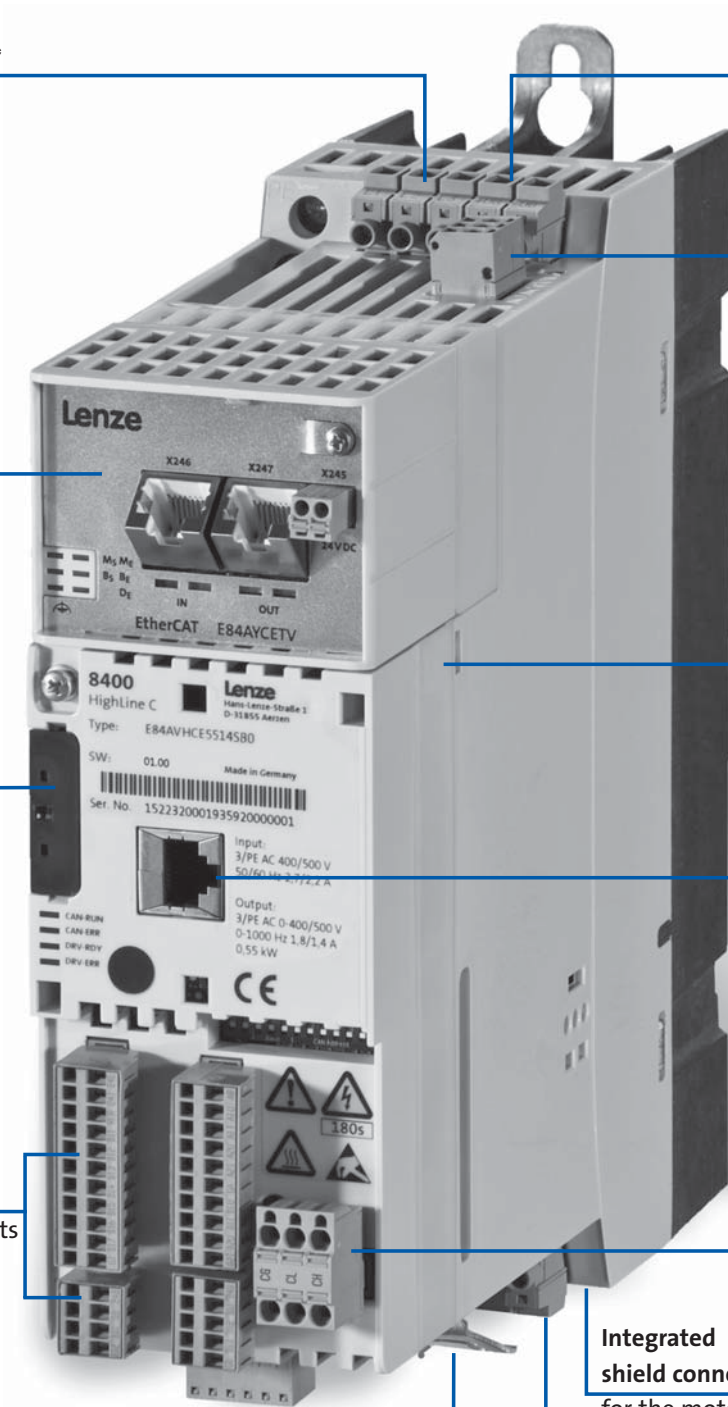

* for 8400 StateLine and HighLine



Inverter Drives 8400

Product information

List of abbreviations

b	[mm]	Dimensions, Width
C_{th}	[KW _s]	Thermal capacity,
f_{ch}	[kHz]	Switching frequency,
f_{max}	[Hz]	Max. field frequency,
h	[mm]	Dimensions, Height
I_{max, out}	[A]	Max. output current, 60 s
I_{N, out}	[A]	Rated output current,
I_{N, AC}	[A]	Rated mains current,
l_{max}	[m]	Max. cable length, Shielded motor cable
m	[kg]	Mass,
M_{max}	[Nm]	Max. torque,
n_{max}	[r/min]	Max. speed,
P	[kW]	Typical motor power, 4-pole asynchronous motor
P_V	[kW]	Power loss,
P_N	[kW]	Rated power,
R_N	[Ω]	Rated resistance,
t	[mm]	Dimensions, Depth
U_{AC}	[V]	Mains voltage,
U_{DC}	[V]	DC supply,
U_{N, AC}	[V]	Rated voltage, AC
U_{out}	[V]	Max. output voltage,

ASM	Asynchronous motor
DIAG	Slot for diagnostic adapter
DIN	Deutsches Institut für Normung e.V.
EN	European standard
EN 60529	Degrees of protection provided by enclosures (IP code)
EN 60721-3	Classification of environmental conditions; Part 3: Classes of environmental parameters and their limit values
EN 61800-3	Electrical variable speed drives Part 3: EMC requirements including special test methods
IEC	International Electrotechnical Commission
IEC 61508	Functional safety of electrical/electronic/programmable electronic safety-related systems
IM	International Mounting Code
IP	International Protection Code
MCI	Slot for communication module (module communication interface)
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)



About this catalogue

This catalogue contains all the components that make up the Inverter Drives 8400 product range and is a document that you can use to select and order your products. You can find comprehensive project planning information in the Operating Instructions and System Manuals for the relevant products. The same product range is also covered in the DSC electronic catalogue, which is available on CD or online at: www.lenze.com/dsc

. You can also download additional information (e.g. rated data) for certain components from the Internet. These components are marked with the following arrow symbol and a corresponding identifier printed in bold.

→ Rated data and dimensioned drawings

DS_GD_8400_0001

Available for download at www.lenze.com/dsc

Just enter this identifier (e.g. **DS_8400_0001**) as the search term and you will get the information as a PDF file.

Inverters and accessories

All components of the 8400 Inverter Drive range can be selected easily and quickly via a uniform product key. For improved clarity, wildcards are used to represent different product versions.

- ▶ The `*` is used, for instance, to group different versions, e.g. E84AV*E7512SX0, where `*` is a wildcard for BC (BaseLine C), BD (BaseLine D), SC (StateLine C) or HC (HighLine C).



Inverter Drives 8400

Product information

The rightsizing principle

The rightsizing principle

We call it Rightsizing: the new Inverter Drives 8400 are designed for process optimisation in all phases of the value added chain. Your expenditure is reduced, from selection to project planning and commissioning, right through to production and service, thereby considerably increasing your productivity.

Rightsized for more productivity

The designs in the 8400 series - BaseLine, StateLine and HighLine - go hand in hand with regard to functionality and drive behaviour. This is why selection is so easy. Diagnostics connections and tools, operation and parameter setting are identical in each version. The strengths of the 8400 series come to the fore in particular in applications which use a variety of designs.

Rightsized for the future

Subsequent adjustments do not pose any problems. If the features of a StateLine no longer meet your requirements, you can simply replace it with a HighLine, without having to redesign your control cabinet. This, as well as eco-friendly production according to ISO 14001 and RoHS, makes the application future-proof.

Rightsized for a quick start

The inverters and the integrated shield connections are delivered completely preassembled, reducing the time you need to spend before and during assembly. The frequency inverter is adapted to your application selecting predefined applications. In the simplest case you can start by setting just two parameters, "Application" and "Setpoint source".

Rightsized for optimum operation

At the heart of our development of human machine interfaces is a consistent focus on the user. Whether you use the keypad or a PC, you will be working with intuitive menus that have been fine-tuned in practice to the very last detail.

Rightsized for quick service

Diagnostics and parameter setting by means of remote maintenance allow for quick and economic service worldwide. The memory module, integrated shield connections and pluggable terminals allow drives to be replaced quickly, thereby reducing machine downtimes.



8400 StateLine with shield connections for control and motor cable removed



The rightsizing principle

Memory module

The memory module serves as the memory unit for all parameters. The pluggable memory chip can be parameterised via the frequency inverter itself or the PC. The parameter settings can then be copied onto any number of modules. The benefit for you is a marked increase in commissioning speed, especially in series machine building. The memory module also allows devices to be replaced quickly and without error.

Safety engineering

The 8400 StateLine and HighLine versions are available with the "safe torque off, STO" safety system as an optional extra. This helps to reduce control costs, save space in the control cabinet and streamline wiring. This safety system is certified to EN ISO 13849-1 (cat. 4, PL e), EN 61508/EN 62061 (SIL 3).

Online diagnostics

All 8400 versions include a standard, hot pluggable interface for easy operation, parameter setting and diagnostics. Data access and parameter modification are available even during operation – whether as a standalone device or networked via a fieldbus.

Standard features of all 8400 versions

- ▶ 150% overload current (60 s)
- ▶ 45 °C operating temperature without current derating (max. 55 °C)
- ▶ degree of protection IP20
- ▶ Memory module for fast commissioning and easy servicing
- ▶ L-force diagnostic interface for diagnostics and parameter setting, even during operation
- ▶ Integrated interference suppression in accordance with EN 61800-3
- ▶ Shield connection for control cables
- ▶ Automatic motor identification for optimum operational performance
- ▶ Protective functions to prevent short circuit, earth fault and motor stalling for safe operation

8400 BaseLine - for continuous motion

The BaseLine design is the entry-level model in terms of functionality and drive behaviour. Featuring an integrated keypad and everything you would expect from a modern frequency inverter suitable for universal use, the 8400 BaseLine is the ideal solution for applications such as conveyor drives, pumps, fans or ventilators.

8400 StateLine - for controlled movement

The 8400 StateLine is intended for drive control with or without speed feedback and is also used when networking via bus systems is needed. The integrated brake management system also delivers greatly reduced wear on the service brakes. Mains switching at too high a rate is also fine for the StateLine as the input circuit is protected from overload. The 8400 StateLine steps up from the BaseLine applications if these have to satisfy more stringent requirements. The StateLine is also perfectly suited to applications such as palletizers, extruders, filling systems or travelling/variable speed drives.

8400 HighLine - for positioning task

In addition to the features of the 8400 StateLine, the 8400 HighLine also offers integrated point-to-point positioning. This allows up to 16 position destinations, including the associated travel profile (e.g. acceleration) to be stored in the inverter. The master control is responsible for selecting these position records and specifying the process. The incremental encoder signal returned is evaluated by two digital inputs. The 8400 HighLine assumes the applications of the 8400 StateLine if these need to satisfy more stringent requirements. The 8400 HighLine is also recommended for applications such as rotary indexing tables, rolling and sliding doors and positioning tasks in warehouse systems.



8400 StateLine push-through or cold plate technique



8400 StateLine with safety engineering



Inverter Drives 8400

Product information

Functions and features

Mode	8400 BaseLine	8400 StateLine
Control types, motor control	V/f control without encoder (linear or quadratic) Sensorless vector control (torque/speed)	V/f control without encoder (linear or quadratic) Sensorless vector control (torque/speed) V/f control with encoder
Basic functions	Application-oriented commissioning (predefined application) Freely assignable user menu Data logger DC brake function Flying restart circuit S-shaped ramps for smooth acceleration Max. output frequency 300 Hz 3 fixed frequencies 180% overload current (3 s)	Application-oriented commissioning (predefined application) Freely assignable user menu Data logger DC brake function Flying restart circuit S-shaped ramps for smooth acceleration Max. output frequency 1000 Hz 15 fixed frequencies 200% overload current (3 s) Change-over of selected parameters Masking frequencies PID controller Switch-off positioning (without feedback) Braking operation without brake resistor Brake management for brake control with low rate of wear Motor phase inversion Logic functions, comparator, arithmetic function Programmable counter Function block interconnection for input and output signals
Monitoring and protective measures	Short circuit Earth fault Overvoltage Motor stalling $I^2 \times t$ monitoring	Short circuit Earth fault Overvoltage Motor stalling $I^2 \times t$ monitoring Motor overtemperature (input for PTC or thermal contact) Motor phase failure Mains phase failure Protection against restart for cyclic mains switching
Diagnostics		
Diagnostic interface	Integrated For USB diagnostic adapter in PC connection	Integrated For USB diagnostic adapter with PC connection or X400 keypad
Status display	4 LEDs	4 LEDs
Braking operation		
Brake chopper	Integrated (400 V types)	Integrated
Brake resistor	External (400 V types)	External



Functions and features

Mode	8400 HighLine
Control types, motor control	V/f control without encoder (linear or quadratic) Sensorless vector control (torque/speed) V/f control with encoder Servo control (asynchronous motor)
Basic functions	Application-oriented commissioning (predefined application) Freely assignable user menu Data logger DC brake function Flying restart circuit S-shaped ramps for smooth acceleration Max. output frequency 1000Hz 15 fixed frequencies 200% overload current (3 s) Change-over of selected parameters Masking frequencies PID controller Switch-off positioning (without feedback) Braking operation without brake resistor Brake management for brake control with low rate of wear Motor phase inversion Logic functions, comparator, arithmetic function Programmable counter Function block interconnection for input and output signals Free function block interconnection Point-to-point positioning
Monitoring and protective measures	Short circuit Earth fault Overvoltage Motor stalling $I^2 \times t$ monitoring Motor overtemperature (input for PTC or thermal contact) Motor phase failure Mains phase failure Protection against restart for cyclic mains switching
Diagnostics	
Diagnostic interface	Integrated For USB diagnostic adapter with PC connection or X400 keypad
Status display	4 LEDs
Braking operation	
Brake chopper	Integrated
Brake resistor	External



Inverter Drives 8400

Product information

Control connections

Mode	8400 BaseLine	8400 StateLine	8400 HighLine
Analog inputs			
Number	1	1	2
Resolution	10 bits	10 bits	10 bits
Value range	0 ... 10V, 0/4 ... 20mA	0 ... +/- 10V, 0/4 ... 20mA	0 ... +/- 10V, 0/4 ... 20mA
Analog outputs			
Number		1	2
Resolution		10 bits	10 bits
Value range		0 ... 10V	0 ... 10V, 0/4 ... 20mA
Digital inputs			
Number	5	5	8
Switching level	PLC (IEC 61131-2)	PLC (IEC 61131-2)	PLC (IEC 61131-2)
Max. input current	11mA	11mA	11mA
Function			2 inputs can optionally be used as frequency inputs (10 kHz, 2-track)
Digital outputs			
Number	1	1	4
Switching level	PLC (IEC 61131-2)	PLC (IEC 61131-2)	PLC (IEC 61131-2)
Max. output current	50mA	50mA	1 x 2.5A, (basic insulation, with spark suppressor, e.g. for 24 V service brake) 3 x 50mA
Relay			
Number	1	1	1
Contact	NO contact	Changeover contact	Changeover contact
AC connection	250V, 3A	250V, 3A	250V, 3A
DC connection	24V, 2A ... 240V, 0.16A	24V, 2A ... 240V, 0.16A	24V, 2A ... 240V, 0.16A
External DC supply¹⁾			
Rated voltage		24 V	24 V
Interfaces			
CANopen	integrated (BaseLine C) Functional insulation max. Übertragungsrate 500 kBit/s	Integrated Functional insulation max. Übertragungsrate 500 kBit/s	Integrated Functional insulation max. Übertragungsrate 1000 kBit/s
Extensions		Optional Communication module	Optional Communication module
Safety engineering		Optional "Safe Torque Off (STO)"	Optional "Safe Torque Off (STO)"
Drive interface			
Encoder input		Via 2 digital inputs HTL, 2-track Limit frequency: 10 kHz Can also be used as a frequency input	Via 2 digital inputs HTL, 2-track Limit frequency: 100 kHz Can also be used as a frequency input

¹⁾ To mains-independent control electronics supply

→ Circuit diagrams

DS_SP_8400_0001

Available for download at www.lenze.com/dsc



Standards and operating conditions

Conformity Type			CE: Low-Voltage Directive 2006/95/EC
Approval UL 508C ¹⁾			Power Conversion Equipment (file no. E132659)
Certification			GOST-R
Enclosure EN 60529 ²⁾ NEMA ²⁾			IP20 Protection against contact according to NEMA 250 type 1
Climatic conditions Storage (EN 60721-3-1) Transport (EN 60721-3-2) Operation (EN 60721-3-3) Power reduction above 45°C			1K3 (temperature: -25 °C ... +60 °C) 2K3 (temperature: -25 °C ... +70 °C) 3K3 (temperature: -10°C ... +55°C) 2.5% / K
Site altitude Amsl Power reduction above 1000 m	H_{max}	[m] [%/1000 m]	4000 5.00
Vibration resistance Transport (EN 60721-3-2) Operation (EN 61800-5-1) Operation (Germanischer Lloyd)			2M2 10 Hz ≤ f ≤ 57 Hz: ± 0.075 mm amplitude, 57 Hz ≤ f ≤ 150 Hz: 1.0 g 5 Hz ≤ f ≤ 13.2 Hz ± 1 mm amplitude, 13.2 Hz ≤ f ≤ 100 Hz: 0.7 g

¹⁾ In preparation for 7.5 ... 15 kW built-in units, 3.0 ... 15.0 kW cold-plate and push-through technique, safety engineering and EtherCAT

²⁾ Mounted and ready-to-use

Supply form		Systems with earthed star point (TN and TT systems) Systems with high-resistance or isolated star point (IT systems) ³⁾
Noise emission EN 61800-3		Integrated RFI suppression: cable-guided, category C2 up to 25 m shielded motor cable
Insulation resistance EN 61800-5-1		Above 2000 m amsl overvoltage category II Overvoltage category III
Pollution degree EN 61800-5-1		2
Protective insulation of control circuits EN 61800-5-1		Safe mains isolation: double /reinforced insulation

³⁾ 8400 StateLine and 8400 HighLine



Inverter Drives 8400

Inverter

Rated data

- ▶ The data is valid for operation at 230 V AC.
- ▶ Unless otherwise specified, the data refers to the default setting.

→ Rated data and dimensioned drawings
DS_GD_8400_0001
 Available for download at www.lenze.com/dsc

Typical motor power 4-pole asynchronous motor	P	[kW]	0.25	0.37
Product key ¹⁾			E84AV□□□2512□□0	E84AV□□□3712□□0
Mains voltage range	U_{AC}	[V]	1/N/PE AC 180 V-0 % ... 264 V+0 %, 45 Hz-0 % ... 65 Hz+0 %	
DC supply	U_{DC}	[V]	not possible	
Rated output current ²⁾	I_{N, out}	[A]	1.70	2.40
Max. cable length Shielded motor cable C2	I_{max}	[m]	100	
Shielded motor cable	I_{max}	[m]	50	

¹⁾ → 8 - See product key – illustration features accessories/modules

²⁾ Overload: 150% * I_r for 60 s, 200% (BaseLine 180%) * I_r for 3 s

Dimensions

Dimensions BaseLine

Dimensions				
Height	h	[mm]	165	165
Width	b	[mm]	70	70
Depth ³⁾	t	[mm]	144	144

³⁾ Depth of 8400 BaseLine with CANopen (BaseLine C), additional 8 mm
 Dimensions for StateLine, HighLine built-in unit

Dimensions				
Height	h	[mm]	165	165
Width	b	[mm]	70	70
Depth ⁴⁾	t	[mm]	199	199

⁴⁾ Depth of 8400 StateLine and HighLine with safety engineering, additional 20 mm

Dimensions cold plate Stateline, HighLine

Dimensions				
Height, including fastening	h	[mm]	186	186
Width, including fastening	b	[mm]	102	102
Depth ⁴⁾	t	[mm]	185	185

Dimensions for StateLine, HighLine push-through technique


Dimensions				
Height, including fastening	h	[mm]	186	186
Width, including fastening	b	[mm]	102	102
Depth (cabinet side) ⁴⁾	t	[mm]	185	185



Rated data

- ▶ The data is valid for operation at 230 V AC.
- ▶ Unless otherwise specified, the data refers to the default setting.

→ Rated data and dimensioned drawings
DS_GD_8400_0001
 Available for download at www.lenze.com/dsc

				
Typical motor power 4-pole asynchronous motor	P	[kW]	0.55	0.75
Product key ¹⁾			E84AV□□□5512□□0	E84AV□□□7512□□0
Mains voltage range	U_{AC}	[V]	1/N/PE AC 180 V-0 % ... 264 V+0 %, 45 Hz-0 % ... 65 Hz+0 %	
DC supply	U_{DC}	[V]	not possible	
Rated output current ²⁾	I_{N, out}	[A]	3.00	4.00
Max. cable length Shielded motor cable C2	I_{max}	[m]	100	
Shielded motor cable	I_{max}	[m]	50	

¹⁾ →  8 - See product key – illustration features accessories/modules

²⁾ Overload: 150% * I_r for 60 s, 200% (BaseLine 180%) * I_r for 3 s

Dimensions

Dimensions BaseLine

Dimensions				
Height	h	[mm]	165	165
Width	b	[mm]	70	70
Depth ³⁾	t	[mm]	162	162

³⁾ Depth of 8400 BaseLine with CANopen (BaseLine C), additional 8 mm
 Dimensions for StateLine, HighLine built-in unit

Dimensions				
Height	h	[mm]	215	215
Width	b	[mm]	70	70
Depth ⁴⁾	t	[mm]	199	199

⁴⁾ Depth of 8400 StateLine and HighLine with safety engineering, additional 20 mm

Dimensions cold plate Stateline, HighLine

Dimensions				
Height, including fastening	h	[mm]	236	236
Width, including fastening	b	[mm]	102	102
Depth ⁴⁾	t	[mm]	163	163

Dimensions for StateLine, HighLine push-through technique

Dimensions				
Height, including fastening	h	[mm]	236	236
Width, including fastening	b	[mm]	102	102
Depth (cabinet side) ⁴⁾	t	[mm]	163	163



Inverter Drives 8400

Inverter

Rated data

- ▶ The data is valid for operation at 230 V AC.
- ▶ Unless otherwise specified, the data refers to the default setting.

→ Rated data and dimensioned drawings
DS_GD_8400_0001
 Available for download at www.lenze.com/dsc

Typical motor power 4-pole asynchronous motor	P	[kW]	1.10	1.50	2.20
Product key ¹⁾			E84AV□□□1122□□0	E84AV□□□1522□□0	E84AV□□□2222□□0
Mains voltage range	U_{AC}	[V]	1/N/PE AC 180 V-0 % ... 264 V+0 %, 45 Hz-0 % ... 65 Hz+0 %		
DC supply	U_{DC}	[V]	not possible		
Rated output current ²⁾	I_{N, out}	[A]	5.50	7.00	9.50
Max. cable length Shielded motor cable C2	I_{max}	[m]	100		
Shielded motor cable	I_{max}	[m]	50		

¹⁾ → 8 - See product key – illustration features accessories/modules

²⁾ Overload: 150% * I_r for 60 s, 200% (BaseLine 180%) * I_r for 3 s

Dimensions

Dimensions BaseLine

Dimensions					
Height	h	[mm]	165	215	215
Width	b	[mm]	70	70	70
Depth ³⁾	t	[mm]	162	162	162

³⁾ Depth of 8400 BaseLine with CANopen (BaseLine C), additional 8 mm
 Dimensions for StateLine, HighLine built-in unit

Dimensions					
Height	h	[mm]	270	270	270
Width	b	[mm]	70	70	70
Depth ⁴⁾	t	[mm]	199	199	199

⁴⁾ Depth of 8400 StateLine and HighLine with safety engineering, additional 20 mm

Dimensions cold plate Stateline, HighLine

Dimensions					
Height, including fastening	h	[mm]	295	295	295
Width, including fastening	b	[mm]	137	137	137
Depth ⁴⁾	t	[mm]	163	163	163

Dimensions for StateLine, HighLine push-through technique


Dimensions					
Height, including fastening	h	[mm]	295	295	295
Width, including fastening	b	[mm]	137	137	137
Depth (cabinet side) ⁴⁾	t	[mm]	163	163	163



Rated data

- ▶ The data is valid for operation at 400 V AC.
- ▶ Unless otherwise specified, the data refers to the default setting.

→ Rated data and dimensioned drawings
DS_GD_8400_0002
 Available for download at www.lenze.com/dsc

					
Typical motor power 4-pole asynchronous motor	P	[kW]	0.37	0.55	0.75
Product key ¹⁾			E84AV□□□3714□□□	E84AV□□□5514□□□	E84AV□□□7514□□□
Mains voltage range	U_{AC}	[V]	3/PE AC 320 V-0 % ... 550 V+0 %, 45 Hz-0 % ... 65 Hz+0 %		
DC supply ³⁾	U_{DC}	[V]	DC 450 -0 % ... 775 V +0 %		
Rated output current ²⁾	I_{N, out}	[A]	1.00	1.80	2.40
Max. cable length Shielded motor cable C2	I_{max}	[m]	100		
Shielded motor cable	I_{max}	[m]	50		

¹⁾ →  8 - See product key – illustration features accessories/modules

²⁾ Overload: 150% * I_r for 60 s, 200% (BaseLine 180%) * I_r for 3 s

³⁾ A connector (order No.: EWS0074/M) is required for the 8400 BaseLine.

Dimensions

Dimensions BaseLine

Dimensions					
Height	h	[mm]	165	165	165
Width	b	[mm]	70	70	70
Depth ⁴⁾	t	[mm]	162	162	162

⁴⁾ Depth of 8400 BaseLine with CANopen (BaseLine C), additional 8 mm

Dimensions for StateLine, HighLine built-in unit

Dimensions					
Height	h	[mm]	215	215	215
Width	b	[mm]	70	70	70
Depth ⁵⁾	t	[mm]	199	199	199

⁵⁾ Depth of 8400 StateLine and HighLine with safety engineering, additional 20 mm

Dimensions cold plate Stateline, HighLine

Dimensions					
Height, including fastening	h	[mm]	236	236	236
Width, including fastening	b	[mm]	102	102	102
Depth ⁵⁾	t	[mm]	163	163	163

Dimensions for StateLine, HighLine push-through technique

Dimensions					
Height, including fastening	h	[mm]	236	236	236
Width, including fastening	b	[mm]	102	102	102
Depth (cabinet side) ⁵⁾	t	[mm]	163	163	163



Inverter Drives 8400

Inverter

Rated data

- ▶ The data is valid for operation at 400 V AC.
- ▶ Unless otherwise specified, the data refers to the default setting.

→ Rated data and dimensioned drawings
DS_GD_8400_0002
 Available for download at www.lenze.com/dsc

Typical motor power 4-pole asynchronous motor	P	[kW]	1.10	1.50	2.20
Product key ¹⁾			E84AV□□□1124□□0	E84AV□□□1524□□0	E84AV□□□2224□□0
Mains voltage range	U_{AC}	[V]	3/PE AC 320 V-0 % ... 550 V+0 %, 45 Hz-0 % ... 65 Hz+0 %		
DC supply ³⁾	U_{DC}	[V]	DC 450 -0 % ... 775 V +0 %		
Rated output current ²⁾	I_{N, out}	[A]	3.20	3.90	5.60
Max. cable length Shielded motor cable C2	I_{max}	[m]	100		
Shielded motor cable	I_{max}	[m]	50		

¹⁾ → 8 - See product key – illustration features accessories/modules

²⁾ Overload: 150% * I_r for 60 s, 200% (BaseLine 180%) * I_r for 3 s

³⁾ A connector (order No.: EWS0074/M) is required for the 8400 BaseLine.

Dimensions

Dimensions BaseLine

Dimensions					
Height	h	[mm]	165	165	215
Width	b	[mm]	70	70	70
Depth ⁴⁾	t	[mm]	162	162	162

⁴⁾ Depth of 8400 BaseLine with CANopen (BaseLine C), additional 8 mm

Dimensions for StateLine, HighLine built-in unit

Dimensions					
Height	h	[mm]	270	270	270
Width	b	[mm]	70	70	70
Depth ⁵⁾	t	[mm]	199	199	199

⁵⁾ Depth of 8400 StateLine and HighLine with safety engineering, additional 20 mm

Dimensions cold plate Stateline, HighLine

Dimensions					
Height, including fastening	h	[mm]	295	295	295
Width, including fastening	b	[mm]	137	137	137
Depth ⁵⁾	t	[mm]	163	163	163

Dimensions for StateLine, HighLine push-through technique


Dimensions					
Height, including fastening	h	[mm]	295	295	295
Width, including fastening	b	[mm]	137	137	137
Depth (cabinet side) ⁵⁾	t	[mm]	163	163	163



Rated data

- ▶ The data is valid for operation at 400 V AC.
- ▶ Unless otherwise specified, the data refers to the default setting.

→ Rated data and dimensioned drawings
DS_GD_8400_0002
 Available for download at www.lenze.com/dsc

					
Typical motor power 4-pole asynchronous motor	P	[kW]	3.00	4.00	5.50
Product key ¹⁾			E84AV□□□3024□□□	E84AV□□□4024□□□	E84AV□□□5524□□□
Mains voltage range	U_{AC}	[V]	3/PE AC 320 V-0 % ... 550 V+0 %, 45 Hz-0 % ... 65 Hz+0 %		
DC supply ³⁾	U_{DC}	[V]	DC 450 -0 % ... 775 V +0 %		
Rated output current ²⁾	I_{N, out}	[A]	7.30	9.50	13.0
Max. cable length Shielded motor cable C2	I_{max}	[m]		100	
Shielded motor cable	I_{max}	[m]		50	

¹⁾ →  8 - See product key – illustration features accessories/modules

²⁾ Overload: 150% * I_r for 60 s, 200% (BaseLine 180%) * I_r for 3 s

³⁾ A connector (order No.: EWS0074/M) is required for the 8400 BaseLine.

Dimensions

Dimensions BaseLine

Dimensions					
Height	h	[mm]	215		
Width	b	[mm]	70	-	-
Depth ⁴⁾	t	[mm]	162		

⁴⁾ Depth of 8400 BaseLine with CANopen (BaseLine C), additional 8 mm

Dimensions for StateLine, HighLine built-in unit

Dimensions					
Height	h	[mm]	270	270	270
Width	b	[mm]	140	140	140
Depth ⁵⁾	t	[mm]	199	199	199

⁵⁾ Depth of 8400 StateLine and HighLine with safety engineering, additional 20 mm

Dimensions cold plate Stateline, HighLine

Dimensions					
Height, including fastening	h	[mm]	321	321	321
Width, including fastening	b	[mm]	174	174	174
Depth ⁵⁾	t	[mm]	141	141	141

Dimensions for StateLine, HighLine push-through technique

Dimensions					
Height, including fastening	h	[mm]	321	321	321
Width, including fastening	b	[mm]	174	174	174
Depth (cabinet side) ⁵⁾	t	[mm]	141	141	141



Inverter Drives 8400

Inverter

Rated data

- ▶ The data is valid for operation at 400 V AC.
- ▶ Unless otherwise specified, the data refers to the default setting.

→ Rated data and dimensioned drawings
DS_GD_8400_0002
 Available for download at www.lenze.com/dsc

Typical motor power 4-pole asynchronous motor	P	[kW]	7.50	11.0	15.0³⁾
Product key¹⁾			E84AV□□□7524□□0	E84AV□□□1134□□0	E84AV□□□1534□□0
Mains voltage range	U_{AC}	[V]	3/PE AC 320 V-0 % ... 550 V+0 %, 45 Hz-0 % ... 65 Hz+0 %		
DC supply	U_{DC}	[V]	DC 450 -0 % ... 775 V +0 %		
Rated output current²⁾	I_{N, out}	[A]	16.5	23.5	32.0
Max. cable length Shielded motor cable C2	I_{max}	[m]	100		
Shielded motor cable	I_{max}	[m]	50		

¹⁾ → 8 - See product key – illustration features accessories/modules

²⁾ Overload: 150% * I_r for 60 s, 200% * I_r for 3 s

³⁾ Operation only permitted with mains choke

Dimensions

Dimensions for StateLine, HighLine built-in unit

Dimensions					
Height	h	[mm]	325	325	325
Width	b	[mm]	140	140	140
Depth ⁴⁾	t	[mm]	199	199	199

⁴⁾ Depth of 8400 StateLine and HighLine with safety engineering, additional 20 mm

Dimensions cold plate Stateline, HighLine

Dimensions					
Height, including fastening	h	[mm]	381	381	381
Width, including fastening	b	[mm]	174	174	174
Depth ⁴⁾	t	[mm]	141	141	141

Dimensions for StateLine, HighLine push-through technique


Dimensions					
Height, including fastening	h	[mm]	381	381	381
Width, including fastening	b	[mm]	174	174	174
Depth (cabinet side) ⁴⁾	t	[mm]	141	141	141



Weights

► The tables below show the weights without options and without packaging.

Mode	Product key	Mass
		m
		[kg]
8400 BaseLine	E84AV□□□2512□□0	1.20
	E84AV□□□3712□□0	
	E84AV□□□5512□□0	
	E84AV□□□7512□□0	
	E84AV□□□1122□□0	1.40
	E84AV□□□1522□□0	1.90
	E84AV□□□2222□□0	
	E84AV□□□3714□□0	1.20
	E84AV□□□5514□□0	
	E84AV□□□7514□□0	
	E84AV□□□1124□□0	
	E84AV□□□1524□□0	1.40
	E84AV□□□2224□□0	1.90
	E84AV□□□3024□□0	2.10

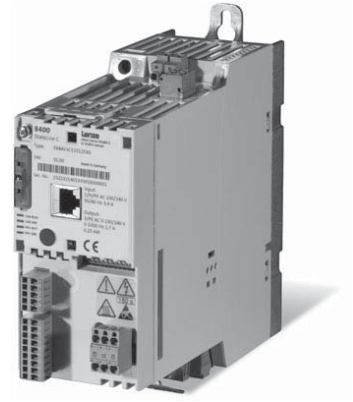

Mode	Product key	Mass
		m
		[kg]
8400 Stateline	E84AV□□□2512□□0	1.30
	E84AV□□□3712□□0	
	E84AV□□□5512□□0	
	E84AV□□□7512□□0	1.80
	E84AV□□□1122□□0	2.10
	E84AV□□□1522□□0	
	E84AV□□□2222□□0	
	E84AV□□□3714□□0	
	E84AV□□□5514□□0	1.80
	E84AV□□□7514□□0	2.10
	E84AV□□□1124□□0	
	E84AV□□□1524□□0	
	E84AV□□□2224□□0	
	E84AV□□□3024□□0	4.40
	E84AV□□□4024□□0	
	E84AV□□□5524□□0	
	E84AV□□□7524□□0	5.80
E84AV□□□1134□□0		
E84AV□□□1534□□0		

Mode	Product key	Mass
		m
		[kg]
8400 HighLine	E84AV□□□2512□□0	1.30
	E84AV□□□3712□□0	
	E84AV□□□5512□□0	
	E84AV□□□7512□□0	1.80
	E84AV□□□1122□□0	2.10
	E84AV□□□1522□□0	
	E84AV□□□2222□□0	
	E84AV□□□3714□□0	
	E84AV□□□5514□□0	1.80
	E84AV□□□7514□□0	2.10
	E84AV□□□1124□□0	
	E84AV□□□1524□□0	
	E84AV□□□2224□□0	
	E84AV□□□3024□□0	4.40
	E84AV□□□4024□□0	
	E84AV□□□5524□□0	
	E84AV□□□7524□□0	5.80
E84AV□□□1134□□0		
E84AV□□□1534□□0		

► push-through technique version: 0.100 kg.
 safety engineering version: 0.100 kg
 communication module: 0.200 kg



Inverter Drives 8400

Accessories

Brake resistors

An external brake resistor is required to brake high moments of inertia or in the event of prolonged operation in generator mode; this resistor converts braking energy into heat.

The brake resistors recommended in the table below have been dimensioned for approx. 1.5 times the regenerative power, with a cycle time of 15/135 s (brake/rest ratio). These brake resistors generally meet the usual requirements of standard applications.

The brake resistors are fitted with a thermostat (potential-free NC contact).



ERBM...(IP50) brake resistor

Typical motor power	Mains voltage	Product key		Rated resistance	Rated power	Thermal capacity	Dimensions	Mass
		Inverter	Brake resistor					
P	U _{AC}			R _N	P _N	C _{th}	h x b x t	m
[kW]	[V]			[Ω]	[W]	[KW _s]	[mm]	[kg]
0.25	1 AC 180 ... 264	E84AV□□□2512□□□	ERBM180R050W	180.0	50.0	8	175 x 21 x 40	0.28
0.37		E84AV□□□3712□□□						
0.55		E84AV□□□5512□□□	ERBM100R100W	100.0	100.0	15	240 x 80 x 95	0.50
0.75		E84AV□□□7512□□□						
1.10		E84AV□□□1122□□□	ERBP033R200W	33.0	200.0	30	240 x 41 x 122	1.00
1.50		E84AV□□□1522□□□						
2.20		E84AV□□□2222□□□	ERBP033R300W		300.0	45	320 x 41 x 122	1.40
0.37	3 AC 320 ... 550	E84AV□□□3714□□□	ERBM390R100W	390.0	100.0	15	235 x 21 x 40	0.37
0.55		E84AV□□□5514□□□						
0.75		E84AV□□□7514□□□	ERBP180R200W	180.0	200.0	30	240 x 41 x 122	1.00
1.10		E84AV□□□1124□□□						
1.50		E84AV□□□1524□□□	ERBP180R300W		300.0	45	320 x 41 x 122	1.40
2.20		E84AV□□□2224□□□						

▶ The brake resistor is directly connected to the frequency inverter. A connector (order designation: EWS0074/M) is required for the 8400 BaseLine (400 V devices) for this purpose.

→ Data sheet on ERBM brake resistors
DS_ZB_ERBM_0001
 Available for download at www.lenze.com/dsc

→ Data sheet on ERBP brake resistors
DS_ZB_ERBP_0001
 Available for download at www.lenze.com/dsc



Brake resistors

The resistance assignment in accordance with the dimensioning specifications above now applies for the following combinations:

- E84AVSCE3024xXx and ERBP180R300W
- E84AVSCE4024xXx and ERBS047R400W
- E84AVSCE5524xXx and ERBS047R800W
- E84AVSCE7524xXx and ERBS027R01K2
- E84AVSCE1134xXx and ERBS027R01K2
- E84AVSCE1534xXx and ERBS018R01K4



ERBP...(IP21) and ERBS...(IP65) brake resistor

Typical motor power	Mains voltage	Product key		Rated resistance	Rated power	Thermal capacity	Dimensions	Mass
		Inverter	Brake resistor					
P	U _{AC}			R _N	P _N	C _{th}	h x b x t	m
[kW]	[V]			[Ω]	[W]	[KWs]	[mm]	[kg]
3.00	3 AC 320 ... 550	E84AV□□□3024□□0	ERBP180R300W	180.0	300.0	45	320 x 41 x 122	1.40
			ERBP047R200W		200.0	30		1.00
			ERBS047R400W		400.0	60		400 x 110 x 105
4.00		E84AV□□□4024□□0	ERBP047R200W	47.0	200.0	30	320 x 41 x 122	1.00
			ERBS047R400W		400.0	60	400 x 110 x 105	2.30
			ERBS047R800W		800.0	120	710 x 110 x 105	3.90
5.50		E84AV□□□5524□□0	ERBP047R200W		200.0	30	320 x 41 x 122	1.00
			ERBS047R400W		400.0	60	400 x 110 x 105	2.30
			ERBS047R800W		800.0	120	710 x 110 x 105	3.90
7.50		E84AV□□□7524□□0	ERBP027R200W	27.0	200.0	30	320 x 41 x 122	1.00
			ERBS027R600W		600.0	90	550 x 110 x 105	3.10
			ERBS027R01K2		1200.0	180	1020 x 110 x 105	5.60
11.0	E84AV□□□1134□□0	ERBP027R200W	200.0		30	320 x 41 x 122	1.00	
		ERBS027R600W	600.0		90	550 x 110 x 105	3.10	
		ERBS027R01K2	1200.0		180	1020 x 110 x 105	5.60	
15.0	E84AV□□□1534□□0	ERBS018R800W	18.0	800.0	120	710 x 110 x 105	3.90	
		ERBS018R01K4		1400.0	210	1110 x 110 x 105	6.20	
		ERBS018R02K8		2800.0	420	1110 x 200 x 105	12.0	

► The brake resistor is directly connected to the frequency inverter. A connector (order designation: EWS0074/M) is required for the 8400 BaseLine (400 V devices) for this purpose.

→ Data sheet on ERBP brake resistors
DS_ZB_ERBP_0001
 Available for download at www.lenze.com/dsc

Data sheet on ERBS brake resistors
DS_ZB_ERBS_0001
 Available for download at www.lenze.com/dsc



Inverter Drives 8400

Accessories

Mains chokes

A mains choke is an inductor that is connected to the mains cable of the inverter. Using a mains choke offers the following advantages:

- ▶ **Less system perturbation:**
The wave form of the mains current is a closer approximation of a sine wave.
- ▶ **Reduced r.m.s. mains current:**
Reduction in mains, cable and fuse load

A mains choke can be used without restriction together with RFI filters and/or sinusoidal filters.



Mains choke

Please note:

Using a mains choke slightly reduces the mains voltage at the inverter input - the typical voltage drop on the mains choke at the rated point is approximately 5%.

Typical motor power	Mains voltage	Product key		Rated current	Dimensions	Mass			
		Inverter	Mains choke						
4-pole asynchronous motor									
P	U _{AC}			I _N	h x b x t	m			
[kW]	[V]			[A]	[mm]	[kg]			
0.25	1 AC 180 ... 264	E84AV□□□2512□□□	ELN1-0900H005	5.00	80 x 66 x 67	2.30			
0.37		E84AV□□□3712□□□							
0.55		E84AV□□□5512□□□	ELN1-0500H009						
0.75		E84AV□□□7512□□□							
1.10		E84AV□□□1122□□□	ELN1-0250H018						
1.50		E84AV□□□1522□□□							
2.20		E84AV□□□2222□□□							
0.37		E84AV□□□3714□□□					ELN3-1500H003-001		
0.55	E84AV□□□5514□□□								
0.75	E84AV□□□7514□□□								
1.10	E84AV□□□1124□□□	ELN3-0680H006-001							
1.50	E84AV□□□1524□□□								
2.20	E84AV□□□2224□□□								
3.00	E84AV□□□3024□□□		ELN3-0500H007-001						
4.00	3 AC 320 ... 550	E84AV□□□4024□□□	ELN3-0250H013-001	7.00	138 x 119 x 95	2.54			
5.50		E84AV□□□5524□□□							
7.50		E84AV□□□7524□□□	ELN3-0170H017-001						
11.0		E84AV□□□1134□□□	ELN3-0150H024-001						
15.0		E84AV□□□1534□□□ ¹⁾	ELN3-0088H035-001						
							35.0	219 x 135 x 225	9.80

¹⁾ Operation only permitted with mains choke



RFI filter

RFI filters are used to ensure compliance with the EMC requirements set out in European standard EN 61800-3. The standard divides EMC requirements for electrical drive systems into various categories.

Category C1 is applicable in public networks (residential areas). With regard to limit values, category C1 corresponds to class B set out in EN 55011.

Category C2 is applicable in industrial premises; use in residential areas is left to the user's discretion. With regard to limit values, category C2 corresponds to class A set out in EN 55011.

External filters can be used if noise emission requirements are more stringent and cannot be met with the RFI filters integrated in the inverter. The filters are suitable for side-by-side or footprint mounting.

Three different types of filter are available:

- ▶ LL (Low Leakage) RFI filters with leakage current < 3.5 mA with 5 m shielded motor cable are suitable for installation in non-fixed systems (category C1 with 5 m shielded motor cable)



RFI filter

- ▶ SD (Short Distance) RFI filters with low leakage current, e.g. for operation on a 30 mA earth leakage circuit breaker with 25 m shielded motor cable (category C1 with 25 m shielded motor cable, category C2 with 50 m shielded motor cable)
- ▶ LD (Long Distance) RFI filters for operation with long motor cables (category C1 with 50 m shielded motor cable, category C2 with 100 m shielded motor cable)

Note:

The motor cable lengths indicated are maximum values.

Typical motor power	Mains voltage	Product key		Rated current	Dimensions	Mass	
4-pole asynchronous motor		Inverter ¹⁾	RFI filter				
P	U _{AC}			I _N	h x b x t	m	
[kW]	[V]			[A]	[mm]	[kg]	
0.25	1 AC 180 ... 264	E84AV□□□2512□□0	E84AZESR3712LL	5.00	212 x 70 x 60	0.80	
0.37			E84AV□□□3712□□0				E84AZESR3712SD
							E84AZESR3712LD
		E84AZESR3712LL					
0.55		E84AV□□□5512□□0	E84AZESR3712SD	6.00	262 x 70 x 60	1.00	
			E84AZESR3712LD				
			E84AZESR5512LL				
0.75		E84AV□□□7512□□0	E84AZESR7512SD	9.00	262 x 70 x 60	1.00	
			E84AZESR7512LD				
			E84AZESR7512LL				
1.10		E84AV□□□1122□□0	E84AZESR2222LL	22.0	317 x 70 x 60	1.40	
			E84AZESR2222SD			1.70	
	E84AZESR2222LD		1.50				
1.50	E84AV□□□1522□□0	E84AZESR2222LL	22.0	317 x 70 x 60	1.40		
		E84AZESR2222SD			1.70		
		E84AZESR2222LD			1.50		
2.20	E84AV□□□2222□□0	E84AZESR2222LL	22.0	317 x 70 x 60	1.40		
		E84AZESR2222SD			1.70		
		E84AZESR2222LD			1.50		

¹⁾ 8400 Stateline and 8400 HighLine



Inverter Drives 8400

Accessories

RFI filter

Typical motor power	Mains voltage	Product key		Rated current	Dimensions	Mass			
4-pole asynchronous motor		Inverter ¹⁾	RFI filter						
P	U _{AC}			I _N	h x b x t	m			
[kW]	[V]			[A]	[mm]	[kg]			
0.37	3 AC 320 ... 550	E84AV□□□3714□□0	E84AZESR7514SD	3.30	262 x 70 x 60	1.10			
			E84AZESR7514LD						
0.55		E84AV□□□5514□□0	E84AZESR7514SD						
			E84AZESR7514LD						
0.75		E84AV□□□7514□□0	E84AZESR7514SD						
			E84AZESR7514LD						
1.10		E84AV□□□1124□□0	E84AZESR2224SD		7.30	317 x 70 x 60	1.50		
			E84AZESR2224LD				1.40		
1.50		E84AV□□□1524□□0	E84AZESR2224SD				1.50		
			E84AZESR2224LD				1.40		
2.20		E84AV□□□2224□□0	E84AZESR2224SD				1.50		
			E84AZESR2224LD				1.40		
3.00		E84AV□□□3024□□0	E84AZESR5524SD				18.0	306 x 140 x 60	3.10
			E84AZESR5524LD						2.20
4.00		E84AV□□□4024□□0	E84AZESR5524SD						3.10
	E84AZESR5524LD		2.20						
5.50	E84AV□□□5524□□0	E84AZESR5524SD	3.10						
		E84AZESR5524LD	2.20						
7.50	E84AV□□□7524□□0								
11.0	E84AV□□□1134□□0	E84AZESR1534LD	29.0	361 x 140 x 60		3.30			
15.0	E84AV□□□1534□□0								

¹⁾ 8400 StateLine and 8400 HighLine

→ Data sheet on RFI filters
DS_ZB_SR_0001
 Available for download at www.lenze.com/dsc



24 V power supply unit

External power supply units can be used as an alternative external supply for the control electronics of the 8400 StateLine or 8400 HighLine. The advantage of an external supply is that the inverter can be parameterised and diagnosed when the mains input is deenergised.



24 V power supply unit

Rated data

Product key			EZV1200-000	EZV2400-000	EZV4800-000	EZV1200-001	EZV2400-001	EZV4800-001
Rated voltage AC	$U_{N,AC}$	[V]	230			400		
Rated mains current	$I_{N,AC}$	[A]	0.84	1.20	2.30	0.34	0.57	1.00
Output voltage	U_{out}	[V]	DC 22.5 ...28.5					
Rated current	I_N	[A]	5.00	10.0	20.0	5.00	10.0	20.0
Dimensions								
Height	h	[mm]				130		
Width	b	[mm]	55	85	157	73	85	160
Depth	t	[mm]				125		
Mass	m	[kg]	0.80	1.24	2.48	0.95	1.10	1.93

Brake switch

The brake switch consists of a rectifier and an electronic circuit breaker for the switching of an electromechanical brake. The brake switch is mounted on the control cabinet plate by means of two screws. Control is carried out via a digital output of the inverter.



Brake switch

Mode	Features	Product key
Half-wave rectification	<ul style="list-style-type: none"> ▶ Input voltage: AC 320 ... 550 V ▶ Output voltage: DC 180 V (at AC 400 V), DC 225 V (at AC 500 V) ▶ Max. brake current: DC 0.61 A ▶ Degree of protection: IP00 	E82ZWBRE
Bridge rectification	<ul style="list-style-type: none"> ▶ Input voltage: AC 180 ... 317 V ▶ Output voltage: DC 205 V (at AC 230 V) ▶ Max. brake current: DC 0.54 A 	E82ZWBRB

→ Data sheet on E82ZWBRE brake switch
DS_Brake_8400_0001
 Available for download at www.lenze.com/dsc

→ Data sheet on E82ZWBRB brake switch
DS_Brake_8400_0002
 Available for download at www.lenze.com/dsc



Inverter Drives 8400

Accessories

USB diagnostic adapter

On the Inverter Drives 8400, operation, parameter setting and diagnostics via the L-force diagnostics interface are carried out using the X400 keypad or a PC. The use of a PC requires the USB diagnostic adapter. A connecting cable is supplied for establishing a connection with the USB interface on the PC.


Connecting cables in three different lengths of 2.5 m, 5 m and 10 m can be purchased separately to connect the USB diagnostic adapter to the L-force diagnostics interface (DIAG) on the inverter. Connection during operation is possible.

The software drivers required for the operation of the adapter are installed automatically when the Lenze software (L-force Engineer) is installed.

- ▶ On the 8400 Stateline and 8400 HighLine, the integrated CANopen interface can be used in conjunction with a PC system bus adapter to provide an alternative method to operation, parameter setting and diagnostics with the PC and the L-force Engineer software.



USB diagnostic adapter incl. connecting cable to PC

Mode		Features	Slot	Product key
USB diagnostic adapter		<ul style="list-style-type: none"> ▶ Input-side voltage supply via USB connection on PC ▶ Output-side voltage supply via diagnostic interface of the inverter ▶ Diagnostic LED ▶ Electrical isolation of PC and inverter ▶ Hot-pluggable ▶ Supported operating systems: Microsoft® Windows® 2000/XP 	DIAG	E94AZCUS

Connecting cables for USB diagnostic adapter

Mode	Features	Product key
Connecting cable for USB diagnostic adapter	▶ Length: 2.5 m	EWL0070
	▶ Length: 5 m	EWL0071
	▶ Length: 10 m	EWL0072




X400 keypad

The keypad can be used as an alternative to a PC for local operation, parameter setting or diagnostics. Data can be accessed quickly via structured menus and a plain text display. The keypad plugs into the L-force diagnostics interface (DIAG) on the front of the inverter.




X400 keypad

Mode		Features	Slot	Product key
X400 keypad		<ul style="list-style-type: none"> ▶ Menu navigation ▶ Graphics display with background lightning for clear presentation of information ▶ 4 navigation keys, 2 context-sensitive keys ▶ Adjustable RUN/STOP function ▶ Hot-pluggable ▶ May be used for 8400 StateLine and HighLine and 9400 StateLine and HighLine 	DIAG	EZAEBK1001

- ▶ 8400 StateLine and 8400 HighLine products are available with a keypad attached. If you want to purchase the products in this complete format, please add the following to the inverter product key when placing your order: E84AV ... 0-XXXXX

X400 diagnosis terminal

Mode		Features	Slot	Product key
X400 diagnosis terminal		<ul style="list-style-type: none"> ▶ X400 keypad in a robust housing ▶ Also suitable for installation in the control cabinet door ▶ Incl. 2.5 m cable ▶ IP20 enclosure, IP65 for control cabinet installation on front face ▶ May be used for 8400 StateLine and HighLine and 9400 StateLine and HighLine 	DIAG	EZAEBK2001



PC system bus adapter

On the 8400 Baseline C, StateLine C and HighLine C, the integrated CANopen interface can be used in conjunction with a PC system bus adapter to provide an alternative method of operation, parameter setting and diagnostics with the PC and L-force Engineer software. This option requires a PC system bus adapter instead of a USB diagnostic adapter. This adapter is plugged into the parallel interface or the USB port on the PC. The corresponding drivers are installed automatically. Depending on the design, the voltage supply for the adapter is provided either via the DIN or PS2 connection or via the USB port on the PC.

Advantage:

- ▶ Operation, parameter setting and diagnostics in parallel to the keypad
- ▶ In networked systems, a number of inverters can be addressed in parallel from a single location (remote parameterisation)



EMF2173IBV003 adapter

Mode	Features	Product key
PC system bus adapter	▶ Voltage supply via DIN port on PC	EMF2173IB
	▶ Voltage supply via PS2 connection on PC	EMF2173IBV002
	▶ Voltage supply via PS2 connection on PC	EMF2173IBV003
	▶ Electrical isolation from the bus	
	▶ Voltage supply via USB port on PC	EMF2177IB
▶ Electrical isolation from the bus		

Shield mounting

Mode	Features	Product key
Shield mounting	<ul style="list-style-type: none"> ▶ Secure fastening of the motor cable shield to the inverter's shield connection ▶ Shipment quantity: 50 metal cable ties ▶ Cable diameter: 8...30 mm 	EZAMBKBM



Setpoint potentiometer

The setpoint (e.g. speed) can be selected using an external potentiometer.
The setpoint potentiometer is connected to the inverter's input terminals. A scale and a rotary knob can also be supplied.



Setpoint potentiometer with scale and rotary knob

Mode	Product key
Potentiometer 10 kohms/1 watt	ERPD0010K0001W
Rotary knob, 36 mm diameter	ERZ0001
Scale 0 ... 100%, 62 mm diameter	ERZ0002

Further accessories

Lenze also offers a whole range of accessories to complement the Inverter Drives 8400. In the PC-based automation catalogue you will find, for example:

- ▶ Remote maintenance components
- ▶ I/O systems
- ▶ Human machine interfaces.




Inverter Drives 8400 Modules

PROFIBUS communication module

A communication module is used to connect the 8400 StateLine or HighLine to a bus system.




PROFIBUS communication module

Mode		Features	Slot	Product key
Communication module				
PROFIBUS		<ul style="list-style-type: none"> ▶ 5 LEDs for status display ▶ Address can be set by means of a DIP switch ▶ Electrically isolated from the bus ▶ Sub-D connection ▶ Suitable for 8400 StateLine and 8400 HighLine Inverter Drives 	MCI	E84AYCPMV/S

- ▶ 8400 StateLine and 8400 HighLine products are available with a PROFIBUS communication module attached. If you want to purchase the products in this complete format, please add the following to the inverter product key when placing your order: E84AV ... 0-PMXXX

Standards and operating conditions

Product key				E84AYCPMV/S
Mode				PROFIBUS
Enclosure				IP20
EN 60529				
Climatic conditions				
Storage (EN 60721-3-1)				1K3 (temperature: -25 °C ... +60 °C)
Transport (EN 60721-3-2)				2K3 (temperature: -25 °C ... +70 °C)
Operation (EN 60721-3-3)				3K3 (temperature: -10°C ... +55°C)
Insulation voltage to reference earth/PE				
EN 61800-5-1	U_{AC}	[V]		50.0



PROFIBUS communication module

Product key			E84AYCPMV/S
Communication Medium Communication profile Drive profile			RS 485 PROFIBUS-DP-V0 PROFIBUS-DP-V1 PROFIDrive, version 3
Baud rate		[kBit / s]	9.6 ... 12 000 (automatic recognition)
Node			Slave
Network topology			with repeater: Line or tree without repeater: Line
Process data words (PCD) 16 bits			1 ... 16
DP user data length			Optionaler Parameterkanal (4 Wörter) + Prozessdatenwörter
Number of bus nodes			31 slaves + 1 master per bus segment With repeaters: 125
Max. cable length per bus segment	I_{max}	[m]	1200 (depending on the baud rate and the cable type used)




Inverter Drives 8400 Modules

EtherCAT communication module

A communication module is used to connect the 8400 StateLine or HighLine to a bus system.



EtherCAT communication module

Mode		Features	Slot	Product key
Communication module				
EtherCAT		<ul style="list-style-type: none"> ▶ Distributed clock ▶ 2 RJ45 connections with LEDs for link/activity ▶ 5 LEDs for status display ▶ Electrically isolated from the bus ▶ Connection option for separate 24 V supply ▶ Suitable for 8400 StateLine and 8400 HighLine Inverter Drives 	MCI	E84AYCETV/S

- ▶ 8400 StateLine and 8400 HighLine products are available with an EtherCAT communication module attached. If you want to purchase the products in this complete format, please add the following to the inverter product key when placing your order: E84AV ... 0-ETXXX

Standards and operating conditions

Product key				E84AYCETV/S
Mode Communication module				EtherCAT
Enclosure EN 60529				IP20
Climatic conditions Storage (EN 60721-3-1) Transport (EN 60721-3-2) Operation (EN 60721-3-3)				1K3 (temperature: -25 °C ... +60 °C) 2K3 (temperature: -25 °C ... +70 °C) 3K3 (temperature: -10°C ... +55°C)
Insulation voltage to reference earth/PE EN 61800-5-1	U _{AC}	[V]		50.0



EtherCAT communication module

Product key			E84AYCETV/S
Communication Medium			CAT5e S/FTP according to ISO/ICE11801 (2002)
Communication profile			CoE (CANopen over EtherCAT)
Baud rate		[MBit / s]	100
Node			Slave
Network topology			Line
Number of logical process data channels			1
Process data words (PCD) 16 bits			1 ... 16
Number of bus nodes			max. 65535
Max. cable length between two nodes	l_{\max}	[m]	100

General


The L-force Engineer is the engineering tool for commissioning and diagnosing the 8400 Inverter Drive. The user interface is intuitive and easy to use. The clearly structured dialogues of the L-force Engineer are specially adapted to the requirements of the users.

Various views are used as the primary means of navigation and these enable the key functions to be sorted and presented in a clear manner. In addition, numerous graphical interfaces simplify the configuration and parameter setting processes for the drives. As a result, in many cases more complicated programming processes can be replaced with a simpler configuration step.

The L-force Engineer StateLevel/HighLevel readily supports multi-drive engineering. A large number of functions enable your machine to be optimally configured, set-up and diagnosed.

The following versions are available:

- ▶ **Engineer StateLevel (can be downloaded free of charge)**
Featuring all necessary diagnostic functions, this product is absolutely ideal for service engineers and commissioners. It is optimised for commissioning Servo Drives 9400 drives and can also be used to implement smaller projects with up to 5 target systems. The CD also includes the GDC easy parameter setting program as well as the L-force Loader tool so that you can commission further target systems.
- ▶ **Engineer HighLevel**
In addition to the functions provided by the Engineer StateLevel software, the Engineer HighLevel version offers essential functions for large projects. These include establishing networks, connecting communication stations and editing function blocks, to name but a few. You can even integrate your own documentation into the Engineer project, so that everything remains available centrally at all times - long searches are a thing of the past. The GDC easy parameter setting program and other programs included on this CD can be used for configuring and commissioning further target systems.
This full version is available as a single-user, multiple user or buyout type licence.

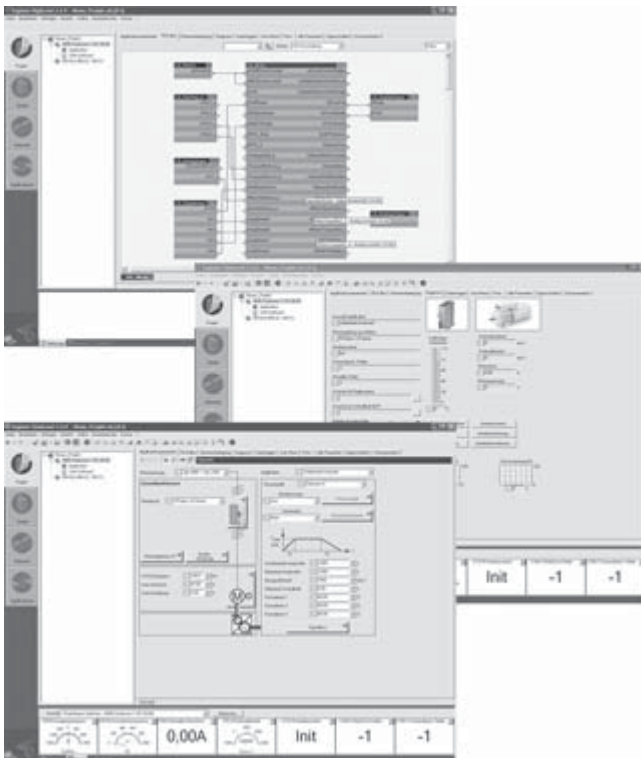

User interfaces of L-force Engineer HighLevel



Functions and features

The following table describes functions and features of the engineering software.

Since not all functions can be accessed by every drive, the engineering software appears differently, depending on the selected drive.

Product key	Free download	
Mode	L-force Engineer StateLevel	L-force Engineer HighLevel
Drives and components	Inverter Drives 8400 Servo Drives 9400 I/O system 1000, I/O system IP20 Lenze motors User motors	Inverter Drives 8400 Servo Drives 9400 I/O system 1000, I/O system IP20 Lenze motors User motors
Project creation	Limitation to 5 target systems	Unlimited
Project documentation		Stored in project
Parameter setting	Graphics-based Parameter list	Graphics-based Parameter list
Networks and communication		CAN network configuration Network configuration - ETHERNET Powerlink Communication interconnection Port editor (communication interface) Creation of machine application
Configuration		Function block editor
Diagnostics Status display	Terminal display/diagnostics overview Monitor window Logbook of all error messages Online values in graphics-based parameterisation Online/offline comparison Oscilloscope: 2-channel	Terminal display/diagnostics overview Monitor window Logbook of all error messages Online values in graphics-based parameterisation Online values in function block editor Network diagnostics Online/offline comparison Oscilloscope: 8-channel



Selection and order data

Benefits at a glance:

- ▶ Simple and transparent project view even of complex projects – independently of the network view
- ▶ High flexibility – functions can easily be post-installed
- ▶ Own project documentation can be integrated into the project – all the information is available at one place and can easily be found
- ▶ New graphics-based user interfaces for parameterising and configuring drives simplify work
- ▶ Simple graphics-based configuration of communication – no need to work with complicated parameters.

Mode	Features	Product key
L-force Engineer StateLevel, freeware	<ul style="list-style-type: none"> ▶ Order free of charge ▶ Download via the Internet ▶ Languages: German/English/French 	Free download
L-force Engineer HighLevel, single user licence	<ul style="list-style-type: none"> ▶ CD-ROM included in scope of supply ▶ Installation on one PC ▶ Includes GDC, GD Loader and GD Oscilloscope ▶ Languages: German/English/French 	ESPEVEHXAOEC1
L-force Engineer HighLevel, multiple user licence	<ul style="list-style-type: none"> ▶ CD-ROM not included in scope of supply ▶ Multiple installations on the number of machines for which licences have been purchased ▶ The basis is a single user licence 	ESPEGEHNNNML1 ESPEVEHNNNML1
L-force Engineer HighLevel, corporate licence	<ul style="list-style-type: none"> ▶ CD-ROM not included in scope of supply ▶ Multiple installations within a company at one location ▶ The basis is a single user licence 	ESPEGEHNNNML1 ESPEVEHNNNML1
L-force Engineer HighLevel, buyout licence	<ul style="list-style-type: none"> ▶ CD-ROM not included in scope of supply ▶ Multiple installations within a company at one location ▶ Issuing of sublicences in conjunction with Lenze drives installed in a machine ▶ The basis is a single user licence 	ESPEGEHNNNML1 ESPEVEHNNNML1
Upgrade of GDC to L-force Engineer HighLevel	▶ Upgrade to Engineer HighLevel single user licence	ESPEVTDNNNEC1
	▶ Upgrade to Engineer HighLevel multiple user licence	ESPEVTDNNNMK1
	▶ Upgrade to Engineer HighLevel corporate licence	ESPEVTDNNNFK1
	▶ Upgrade to Engineer HighLevel buyout licence	ESPEVTDNNNBL1



Data access/communication

The following table describes the communication paths of the engineering software to the connected drives. Some drives do not support all communication paths, so that some communication paths may not be possible.

Communication	
System bus (CAN)	USB connection with USB system bus adapter EMF2177IB Parallel interface with system bus adapter EMF2173IB USB connection with diagnostic adapter E94AZCUS

System requirements

System requirements for L-force Engineer State-Level/HighLevel

The following minimum hardware and software requirements must be met in order to be able to work with the L-force Engineer:

- ▶ Microsoft®Windows® 2000 SP2/XP or higher
- ▶ IBM-compatible PC with Intel® Pentium® processor 1.4 GHz (projects up to a maximum of 5 axes 750 MHz and higher)
- ▶ Min. 512 MB main memory (RAM), (projects up to a maximum of 5 axes min. 256 MB)
- ▶ Min. 950 MB free hard disk space
- ▶ Min. 1024 x 768 pixels screen resolution with 256 display colours
- ▶ Mouse
- ▶ CD-ROM drive
- ▶ Free slots/ports meeting the requirements of the individual fieldbus interface module



Engineering software Notes





Lenze AG

Postfach 10 13 52
D-31763 Hameln
Telefon +49 (0)51 54 / 82-0
Telefax +49 (0)51 54 / 82-28 00
E-Mail: Lenze@Lenze.de
Internet: www.Lenze.com

Lenze Automation GmbH

Grünstraße 36, D-40667 Meerbusch
Telefon +49 (0)51 54 / 99 04-0
Telefax +49 (0)21 32 / 7 21 90

Standort:

Hans-Lenze-Straße 1, D-31855 Aerzen
Postfach 101352, D-31763 Hameln
Telefon +49 (0)51 54 / 82-0
Telefax +49 (0)51 54 / 82-28 00

Standort:

Theodor-Heuss-Straße 4B
D-38122 Braunschweig
Telefon +49 (0)531 / 80178-0
Telefax +49 (0)531 / 80178-20

Lenze Drives GmbH

Postfach 10 13 52, D-31763 Hameln
Breslauer Strasse 3, D-32699 Extertal
Telefon +49 (0)51 54 / 82-0
Telefax +49 (0)51 54 / 82-28 00

Lenze Operations GmbH

Postfach 10 13 52, D-31763 Hameln
Breslauer Strasse 3, D-32699 Extertal
Telefon +49 (0)51 54 / 82-0
Telefax +49 (0)51 54 / 82-28 00

Lenze GmbH & Co KG Anlagenbau

Buchenweg 1
D-31855 Aerzen
Telefon +49 (0)51 54 / 82-0
Telefax +49 (0)51 54 / 82-21 00

Lenze GmbH & Co KG Kleinantriebe

Hans-Lenze-Straße 1
D-32699 Extertal
Telefon +49 (0)51 54 / 82-0
Telefax +49 (0)51 54 / 82-14 85

Lenze Service GmbH

Breslauer Straße 3
D-32699 Extertal

Mechanical Drives

Telefon +49 (0)51 54 / 82-16 26
Telefax +49 (0)51 54 / 82-13 96

Electronic Drives

Telefon +49 (0)51 54 / 82-11 11
Telefax +49 (0)51 54 / 82-11 12

Service Helpline

+49 (0)180 5 20 24 26

Lenze Verbindungstechnik GmbH

IpF-Landesstraße 1
A-4481 ASTEN
Telefon +43 (0)72 24 / 210-0
Telefax +43 (0)72 24 / 210-998

Lenze DETO Drive Systems GmbH & Co KG

Untere Sparchen 16
A-6330 Kufstein
Telefon +43 (0)53 72 / 6 53 15-200
Telefax +43 (0)53 72 / 6 53 15-299

Schmidhauser AG

Obere Neustrasse 1
CH-8590 Romanshorn
Telefon +41 (0)71 466 11 11
Telefax +41 (0)71 466 11 10

encoway GmbH

Buschhöhe 2
D-28357 Bremen
Telefon +49 (0)4 21 / 33003 - 500
Telefax +49 (0)4 21 / 33003 - 555

DEUTSCHLAND/GERMANY

Lenze Vertrieb GmbH

Ludwig-Erhard-Straße 52-56
D-72760 Reutlingen
Telefon +49 (0)71 21 / 9 39 39-0
Telefax +49 (0)71 21 / 9 39 39-29

Region Nord

Dornenpark 1
31840 Hessisch Oldendorf
Telefon (0 51 52) 90 36-0
Telefax (0 51 52) 90 36-33/44/55

Region West

Postfach 10 12 20
47497 Neukirchen-Vluyn
Kelvinstraße 7
47506 Neukirchen-Vluyn
Telefon (0 28 45) 95 93-0
Telefax (0 28 45) 95 93 93

Region Mitte/Ost

Postfach 1463
35724 Herborn
Austraße 81
35745 Herborn
Telefon (0 27 72) 95 94-0
Telefax (0 27 72) 95 94 94

Region Südwest

Postfach 14 33
71304 Waiblingen
Schänzle 8
71332 Waiblingen
Telefon (0 71 51) 9 59 81-0
Telefax (0 71 51) 9 59 81 50

Region Süd

Fraunhoferstraße 16
82152 Martinsried
Telefon (0 89) 89 56 14-0
Telefax (0 89) 89 56 14 14

WELTWEIT/WORLDWIDE

ALGERIA

see FRANCE

ARGENTINA *

E.R.H.S.A.
Girardot 1368, 1427 BUENOS AIRES
Phone +54 (0)11 / 45 54 32 32
Telefax +54 (0)11 / 45 52 36 11

AUSTRALIA *

FCR Motion Technology Pty. Ltd.
Unit 6, Automation Place
38-40 Little Boundary Rd.
LAVERTON NORTH, Vic. 3026
Phone +61 (3) 9362 6800
Telefax +61 (3) 9314 3744

AUSTRIA *

Lenze Antriebstechnik GmbH
IpF-Landesstraße 1
4481 ASTEN
Phone +43 (0)7224 / 210-0
Telefax +43 (0)7224 / 210-999

Office Dornbirn:

Lustenauer Straße 64
6850 DORNBIERN
Phone +43 (0)7224 / 210-0
Telefax +43 (0)7224 / 210-7299

Office Wr. Neudorf:

Triester Straße 14/109
2351 WR. NEUDORF
Phone +43 (0)7224 / 210-0
Telefax +43 (0)7224 / 210-7099

Office Graz:

Seering 8
8141 ÜNTERPREMSTÄTTEN
Phone +43 (0)7224 / 210-0
Telefax +43 (0)7224 / 210-7199

Lenze Verbindungstechnik GmbH

IpF-Landesstraße 1
4481 ASTEN
Phone +43 (0)7224 / 210-0
Telefax +43 (0)7224 / 210-998

Lenze Anlagentechnik GmbH

Mühlenstraße 3
4470 ENNS
Phone +43 (0)7224 / 210-0
Telefax +43 (0)7224 / 210-997

BELARUS

see POLAND

BELGIUM *

Lenze bv.ba
Industriepark Noord, 19.
9100 SINT-NIKLAAS
Phone +32 (0)3.542.62.00
Telefax +32 (0)3.541.37.54

BOSNIA-HERZEGOVINA

see AUSTRIA

BRAZIL *

AC Control Ltda
Rua Gustavo da Silveira 1199
Vila Sta. Catarina
SAO PAULO - S.P. 04376-000
Phone +55 (11) 55 64 65 79 ramal: 214
Telefax +55 (11) 56 79 75 10

BULGARIA

Lenze Zadvizhivasta Tehnika EOOD
Bul. Maritza 21, Office 204
4003 PLOVDIV
Phone +359 / 32 / 940 373
Telefax +359 / 32 / 940 349

CANADA *

see USA

CHILE

Sargent S.A.
Tecnica Thomas C. Sargent
S.A.C.É.L., Casilla 166-D
SANTIAGO DE CHILE
Phone +56 (0)2 / 51 03 000
Telefax +56 (0)2 / 69 83 989

CHINA *

Lenze Drive Systems (Shanghai) Co. Ltd.
No. 2989, Jiangshan Road
Lingang, Shanghai 201306
CHINA
Phone +86 21 3828 0200
Telefax +86 21 3828 0250

COLOMBIA

Casa Sueca, S.A.
Calle 52 1N-74
CALI
Phone +57 -2- 682 0444
Telefax +57 -2- 683 1411

CROATIA

Lenze Antriebstechnik GmbH
Predstavništvo Zagreb
Ulica Grada Gospića 3
HR-1000 ZAGREB
Phone +385-1-2 49 80 56
Telefax +385-1-2 49 80 57

CZECH REPUBLIC

Lenze, s.r.o.
Central Trade Park D1
396 01 HUMPOLEC
Phone +420 565 507-111
Telefax +420 565 507-399

Büro Červený Kostelec:

17. listopadu 510
549 41 ČERVENÝ KOSTELEČ
Phone +420 491 467-111
Telefax +420 491 467-166

DENMARK *

Lenze A/S
Vallensbækvej 18A
2605 BRØNDBY
Phone +45 / 46 96 66 66
Telefax +45 / 46 96 66 60
24 stunde service +45 / 40 93 04 11

Büro Jylland: Lenze A/S

Niels Bohrs Vej 23
8660 SKANDERBORG
Phone +45 / 46 96 66 88
Telefax +45 / 46 96 66 80

EGYPT

WADI Co. for technologies
and development
P.O.Box 209, new center Ramses
11794 CAIRO, Egypt
11 Syria St., Mohandessin
GIZA, Egypt
Phone +2 (02) 3347 6842
Telefax +2 (02) 3347 6843

ESTONIA

see FINLAND

FINLAND *

Lenze Drives
Tierankatu 8
20520 TURKU
Phone +358 2 2748 180
Telefax +358 2 2748 189

FRANCE *

Lenze S.A.
Siège
ZI des Mardelles
44 Rue Blaise Pascal
93600 AULNAY-SOUS-BOIS
Services Commerciaux
Phone 0 825 086 036
Telefax 0 825 086 346

Centre de formation

E-Mail : semin.sidonie@lenze.fr

Questions générales / documentation

E-Mail : info@lenze.fr

Service Après-vente / assistance en ligne

Helpline 24/24 : 0 825 826 117
E-Mail : helpline@lenze.fr

Agences en France

Région France Nord :

ZI des Mardelles
44 Rue Blaise Pascal
93600 AULNAY-SOUS-BOIS
Nantes
44000 NANTES
Strasbourg
67870 GRIESHEIM près MOLSHEIM

Rouen
76500 ELBEUF

Région France Sud :

Parc Technologique
97, allée Alexandre Borodine
Immeuble le Douglas 2
69800 SAINT PRIEST

Agén

47270 SAINT-PIERRE de CLAIRAC

GREECE

GEORGE P. ALEXANDRIS SA
12, K. Mavromichali Street
18545 PIRAEUS
Phone +30 210 41 11 841
Telefax +30 210 41 27 058

Industrial Area, Block 48B, 4th Entrance

57022 SINDOS
Phone +30 2310 556 650
Telefax +30 2310 511 815

HUNGARY *

Lenze Antriebstechnik
Handelsgesellschaft mbH
2040 BUDAÖRS
Gyár utca 2., P.O.Box 322.
Phone +36 (0)23 / 501-320
Telefax +36 (0)23 / 501-339

ICELAND

see DENMARK

INDIA

Lenze Mechatronics Pvt. Ltd.
Lenze Plot No. 46A, Sector-10
PCNTDA Industrial Area
Bhosari
PUNE - 411 026
Phone +91-20-66318100
Telefax +91-20-66318120



Kolkata Sales office
Block No. 81, 8th Floor
Circular Court, 8 A.J.C. Bose Road
KOLKATA - 700017
Phone +91-33-22893161
Telefax +91-33-22893162

New Delhi Sales office
Flat No - 101, Padma Tower - II
22, Rajendra Place
NEW DELHI - 110008
Phone +91-11-45062113/114
Telefax +91-11-45062315

INDONESIA

see MALAYSIA

IRAN

Tavan Ressian Co.
P.O.Box 19395-5177
No. 44, Sh. Bakhtiary Str.
South sh. Ghalandari Ave.
Sadr High way, TEHRAN
Phone +98-(21)-2260 6766
-2260 2655
-2260 9299
Telefax +98-(21)-2200 2883

ISRAEL *

Zeev Melcer LTD
P.O.Box 10011, HAIFA BAY 26110
36 Yosef Levi St., Kiriat Bialik
Phone +972-(0)52-4761426
Telefax +972-(0)4-8742172

ITALY *

Lenze Gerit S.r.l.
Viale Monza 338
20128 MILANO
Phone +39 02 / 270 98.1
Telefax +39 02 / 270 98 290

JAPAN *

Miki Pulley Co., Ltd.
1-39-7 Komatsubara, Zama-city
KANAGAWA 228-8577
Phone +81 (0)462 / 58 16 61
Telefax +81 (0)462 / 58 17 04

LATVIA

see LITHUANIA

LEBANON

I. Network Automation s.a.l.
Ground floor - United insurance building
Facing Mercedes Show room
Dora - High Way
BEIRUT-METEN
P.O.Box 835 - Jounieh - Lebanon
Phone +961-1-249562
Telefax +961-1-249563

LITHUANIA

Lenze UAB
Breslaujos g.3, 44403 KAUNAS
Phone +370 37 407174
Telefax +370 37 407175

LUXEMBOURG *

see BELGIUM

MACEDONIA

Lenze Antriebstechnik GmbH
Pretstavništvo Skopje
ul. Nikola Rusinski 3/A/2, 1000 SKOPJE
Phone +389 2 30 90 090
Telefax +389 2 30 90 091

MALAYSIA

Lenze S.E.A. Sdn Bhd
No. 28 Jalan PJU 3/47
Sunway Damansara, Technology Park
47810 PETALING JAYA
SELANGOR DARUL EHSAN
Phone +60 3 7803 1428
Telefax +60 3 7806 3728

MAURITIUS

Automation & Controls Engineering Ltd
3, Royal Road, Le Hochet, Terre Rouge
MAURITIUS
Phone +230 248 8211
Telefax +230 248 8968

MEXICO

Automatización y Control
de Energía S.A. de C.V.
Av. 2 No. 89 Esq Calle 13
Col. San Pedro de los Pinos
C.P. 03800 MEXICO D.F.
Phone +52 (55) 2636-3540
Telefax +52 (55) 2636-3541

MOROCCO

GUORFET G.T.D.R
Automatisation Industrielle
Bd Chefchaouni Route 110 km, 11.500
No. 353-Aïn-Sabaâ
CASABLANCA
Phone +212/22-35 70 78
Telefax +212/22-35 71 04

NETHERLANDS *

Lenze B.V., Postbus 31 01
5203 DC 'S-HERTOGENBOSCH
Ploegweg 15
5232 BR 'S-HERTOGENBOSCH
Phone +31 (0)73 / 64 56 50 0
Telefax +31 (0)73 / 64 56 51 0

NEW ZEALAND *

Tranz Corporation
343 Church Street
P.O. Box 12-320, Penrose
AUCKLAND
Phone +64 (0)9 / 63 45 51 1
Telefax +64 (0)9 / 63 45 51 8

NORWAY *

Dtc- Lenze as
Stallbakken 5, 2005 RAELINGEN
Phone +47 / 64 80 25 10
Telefax +47 / 64 80 25 11

PHILIPPINES

see MALAYSIA

POLAND

Lenze-Rotiw Sp. z o.o.
ul. Rożdżenieckiego 188b
40-203 KATOWICE
Phone +48 (0)32 / 2 03 97 73
Telefax +48 (0)32 / 7 81 01 80
Lenze Systemy Automatyki Sp. z o.o.
Ul. Rydygiera 47
87-100 TORUN
Phone +48 (0)56 / 6 58 28 00
6 45 34 60
6 45 35 70
6 45 35 76
Telefax +48 (0)56 / 6 45 33 56

PORTUGAL *

Costa Leal el Victor
Electronica-Pneumatica, Lda.
Rua Prof. Augusto Lessa, 269,
Apart. 52053
4202-801 PORTO
Phone +351-22 / 5 50 85 20
Telefax +351-22 / 5 02 40 05

ROMANIA

see AUSTRIA

RUSSIA

OOO Lenze
Shchelkovskoye shosse 5
105122 MOSCOW
Phone +7 495 921 3250
Telefax +7 495 921 3259

SERBIA-MONTENEGRO

see MACEDONIA

SINGAPORE *

see MALAYSIA

SLOVAC REPUBLIC

ECS Sluzby spol. s.r.o.
Staromlynska 29
82106 BRATISLAVA
Phone +421 2 45 25 96 06
+421 2 45 64 31 47
+421 2 45 64 31 48
Telefax +421 2 45 25 96 06

SLOVENIA

LENZE GmbH, Asten, Avstrija
Podružnica Celje
Kidričeva 24
3000 CELJE
Phone +386 03 426 46 40
Telefax +386 03 426 46 50

SOUTH AFRICA *

S.A. Power Services (Pty.) Ltd.
Unit 14, Meadowbrook Business Estates
Jacaranda Ave, Olivevale
Randburg 2158, P.O.Box 1137
RANDBURG 2125
Phone +27(11) 462-8810
Telefax +27(11) 704-5775

SOUTH KOREA *

Lenze Representative Office
No. 606, Daeryung Technotown 6th,
493-6, Gasan-dong, Geumcheon-gu,
SEOUL 153-774
Phone +82 2-792-7017
Telefax +82 2-792-7018

SPAIN *

Lenze Transmisiones, S.A. (Headquarter)
Milà i Fontanals, 135-139
08205 SABADELL
Barcelona
Phone +34 902 02 79 04
Telefax +34 937 122 541
Lenze Delegación Bilbao
Pl. Ibarbarri. Ed. METRO 2º-E
48940 LEJONA
Vizcaya
Phone +34 944 630 510 / 507
Telefax +34 944 314 196

Lenze Delegación Levante

Cullera, 73 - 4ºD
46035 BENIMAMET
Valencia
Phone +34 963 905 225
Telefax +34 963 900 647

Lenze Delegación Madrid

Poema Sinfónico, 25-27. Esc.1, Plta.B,
Loc.3
28054 MADRID
Phone +34 915 103 341
Telefax +34 915 102 061

SWEDEN *

Lenze Transmissioner AB
PO.Box 10 74, Attorpsgatan, Tornby Ind.
58110 LINKÖPING
Phone +46 (0)13 / 35 58 00
Telefax +46 (0)13 / 10 36 23

SWITZERLAND *

Lenze Bachofen AG
Ackerstrasse 45
8610 USTER
Phone +41 (0) 43 399 14 14
Telefax +41 (0) 43 399 14 24
Vente Suisse Romande:
Route de Prilly 25
1023 CRISSIER
Phone +41 (0)21 / 63 72 19 0
Telefax +41 (0)21 / 63 72 19 9

SYRIA

Zahabi Co.
8/5 Shouhadada Street
P.O.Box 8262
ALEPPO-SYRIA
Phone +963 21 21 22 23 5
Telefax +963 21 21 22 23 7

TAIWAN *

Lenze Taiwan Representative Office
Room 1101, 11F, No. 136, Sec. 3,
Ren-Ai Rd.
TAIPEI City, 10657, Taiwan
Phone +886 / (0)2-2705-2161
Telefax +886 / (0)2-2705-6906

THAILAND

see MALAYSIA

TUNESIA

AMF Industrielle Sarl
Route de Gremda - Km 0,2
Immeuble El Madina,
Centre Bloc B - 5 ème - appt 52
3002 SFAX
Phone +216 74 403 514
Telefax +216 74 402 516

TURKEY

LSE Elektrik
Elektronik Makina
Otomasyon Mühendislik
Sanayi ve Ticaret Ltd. Şti
Atatürk mah. Cumhuriyet cad.
Yurt sok. No: 7
ÜMRANIYE/İSTANBUL
Phone +90 (0)216 / 316 5138 pbx
Telefax +90 (0)216 / 443 4277

UKRAINE

SV Altera, Ltd.
Lepse ave., 4
KIEV, 03067
Phone +38 044 496 18 88
Telefax +38 044 496 18-18

UNITED ARAB EMIRATES

LPT (FZC)
X4 Building No. 37
Sharjah Airport Free Zone (SALF ZONE)
SHARJAH
Phone +971 6 5573205
Telefax +971 6 5573206

UNITED KINGDOM/EIRE *

Lenze Ltd.
Caxton Road
BEDFORD MK 41 OHT
Phone +44 (0)1234 / 32 13 21
Telefax +44 (0)1234 / 35 52 99

USA *

AC Technology Corp.
630 Douglas Street
UXBRIDGE, MA 01569
Phone +1 508 / 278-9100
Telefax +1 508 / 278-7873

Lenze DETO Drive Systems USA, LLC
5912 Sterling Drive
HOWELL, MI 48843
Phone +1 517 / 586-4057
Telefax +1 517 / 586-4058

VIETNAM

see MALAYSIA

* Countries connected to the free expert helpline **008000 24 hours (008000 24 46877)**

It's good to know | why we are there for you



"Our customers come first. Customer satisfaction is what motivates us. By thinking in terms of how we can add value for our customers we can increase productivity through reliability."



Vitamin L:
Ideas and added value for your drive and automation solutions.



"We will provide you with exactly what you need – perfectly co-ordinated products and solutions with the right functions for your machines and installations. That is what we mean by 'quality'."



"Take advantage of our wealth of expertise. For more than 60 years now we have been gathering experience in various fields and implementing it consistently and rigorously in our products, motion functions and pre-configured solutions for industry."



"We identify with your targets and strive towards a long-term partnership which benefits both sides. Our competent support and consultation process means that we can provide you with tailor-made solutions. We are there for you and can offer assistance in all of the key processes."

You can rely on our service. Expert advice is available 24 hours a day, 365 days a year, in more than 30 countries via our international helpline: 008000 24 Hours (008000 2446877).

www.Lenze.com

13314266